

# FloorBridge® CPS 20/80 – CPS Mono 20/80 – CPS Duo 20/80

Car park straight

Polymer floor joint profile in carbon fiber composite construction with or without coating flange and replaceable expansion insert.

**Product characteristics:**

- metal-free, therefore non-corrosive
- waterproof version possible
- perfect coating connection due to recessed connection flange
- similar coefficient of thermal expansion as with reactive resin floors
- replaceable expansion insert without damaging the car park coating
- temperature- and weather-resistant
- low installation height
- easy installation
- hardly noticeable vibrations while driving
- problem-free flush joining with mastic asphalt or road asphalt (Mono)
- individual color design (coatable)

**Technical specification:**

Width of joint profile:	approx. 325 mm
Length of joint profile:	approx. 1200 mm installed (1195 mm net)
Thickness of joint profile:	approx. 23 mm
Joint width in substrate:	max. 80 mm
Expansion insert:	approx. 130 mm
Total horizontal joint movement:	80 mm (-30/+50 mm)
Total vertical joint movement:	50 mm (-25/+25 mm)
Operating temperature range:	-25°C to max. of +40°C (if lower or higher temperatures consult the material manufacturer)
Grindable:	max. 2 mm
Compressive strength:	60 N/mm <sup>2</sup> (ONR 23303)
Load (Truck):	600 kN (DIN 1072)
Colour joint profile:	grey
Colour expansion insert:	black
Packaging profiles (Euro-Pallet):	84 sets. à 1,20 m (= 168 pcs. a 1,2 m) total: 100,8 m


**Fields of application:**

Multi-storey and basement car parks

**The installation will be carried out by trained specialist companies.**

**Explanation:**


The joint movements of the components must be calculated by a specialist (structural engineer / planner) and made available to all parties involved. The load specifications do not apply to the floating installation variant.

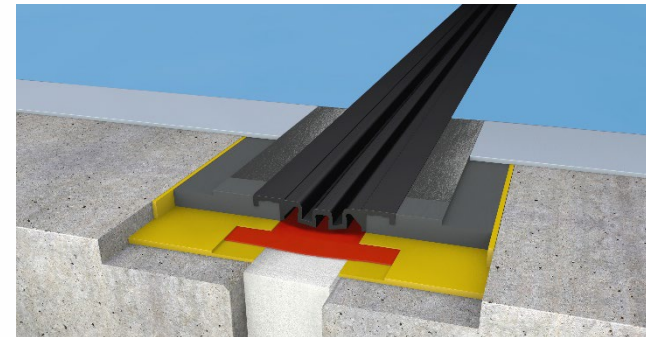

CPS 20/80



CPS Mono 20/80

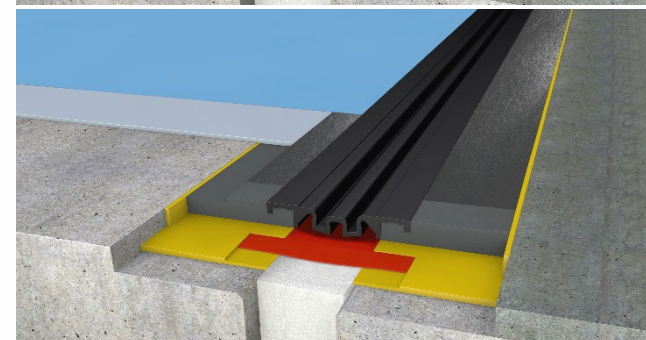

CPS Duo 20/80

**Substrate quality, preparation and processing:**

Refer to the FloorBridge® Installation Manual.

**Application instructions:**

Please refer to the product data sheet of the composite adhesive FloorBridge® series used in the installation and/or the FloorBridge® Installation Manual.

**Cleaning of tools:**

Please refer to the product data sheet of the composite adhesive used in the installation.

**Notes on application / limitations:**

Please store the joint profiles in a horizontal, flat position.

If waterproofing is required, a sealing tape from the FloorBridge® series must be installed under the FloorBridge® joint profile.

As the FloorBridge® joint profile changes colour when exposed to UV-radiation, it must be sealed with a suitable protective coating, if colour stability is required. In the event of very high temperature changes, cracking in the butt joint (adhesive) may occur in the abutting area of the individual profiles. This does not affect the trafficability and tightness of the system and therefore does not affect the usability. FloorBridge® joint profiles may be crossed at a maximum speed of <30 km / h.

If the joint profile has been ground too deep, FloorBridge® International GmbH will not be held liable. No liability is assumed for the case of non-intended use or installation.

**Storage conditions:**

The FloorBridge® joint profiles must be properly stored in unopened, sealed and undamaged original packaging, in a cool and dry place at temperatures between + 5 ° C and + 30 ° C, indoors. Please store the joint profiles only in a horizontal, level position.

**Value Base:**

All technical data stated in this product data sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

**Ecology, health and safety information (Reach):**

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 REACH). It contains no substances, which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product onto the market, to transport or use it. For safe use follow the instructions given in this product data sheet.

Based on our current knowledge, this product does not contain any SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list by the European Chemical Agency in concentrations above 0.1 % (w/w).

**Legal notes:**

The information, and, in particular, the recommendations relating to the application and end-use of FloorBridge® products, are given in good faith based on the current knowledge and experience of FloorBridge® International GmbH about the products, and apply if properly stored, handled and under normal conditions in accordance with FloorBridge® International GmbH recommendations.

In practice, the differences in materials, substrates and deviating working conditions are so important that no warranty in respect of merchantability or of suitability for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered resp. given council.

The user of the product must test the product's suitability for the intended application and purpose. FloorBridge® International GmbH reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to final confirmation and subject to our current terms and conditions regarding sales and deliveries. Users must always refer to the most recent issue of the local product data sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of FloorBridge® International GmbH.